

Batteriekontakt / Battery Probe - UEBK-12142

Material (Material)

Kolben: Kupfer-Beryllium, vergoldet
(*Plunger: Copper-Beryllium, gold plated*)
Stifthülse: Nickel-Silber, vergoldet
(*Barrel: Nickel-Silver, gold plated*)
Feder: Edelstahl
(*Spring: Stainless Steel*)

Elektrische Spezifikation (Electrical specification)


Nennstrom: 15 A
(*Rated current: 15 A*)
Kontaktwiderstand: < 10 mΩ
(*Contact resistance: < 10 mΩ*)

Mechanische Spezifikation (Mechanical specification)


Minimum Raster: 4,45 mm
(*Minimum Centers: 4,45 mm*)
Max. Hub: 2,29 mm
(*Max. travel: 2,29 mm*)
Empfohlener Hub: 1,52 mm
(*Recommended travel: 1,52 mm*)
Federkraft: 1,76 N bei Empfohlenem Hub
(*Spring Force: 1,76 N @ recommended travel*)

Bestellinformation (Order information)

Art. Nr.: UEBK-12142
(*Art. No.: UEBK-12142*)

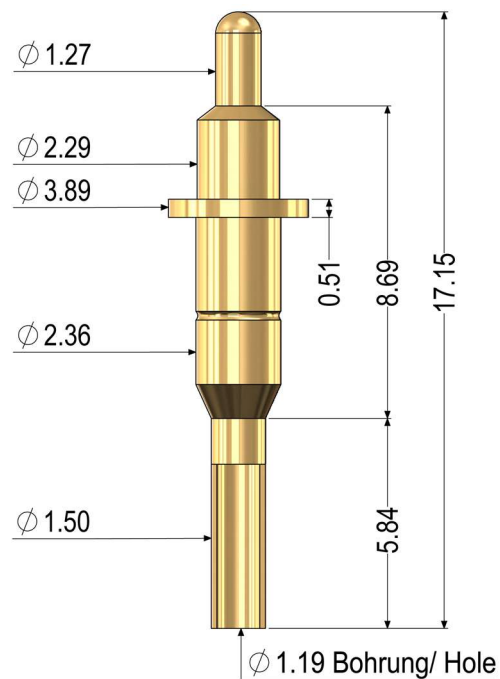

RECOMMENDED FOOTPRINT

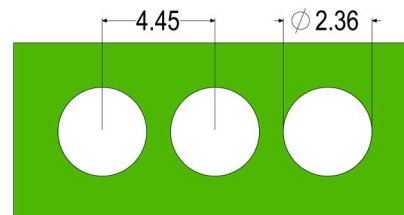

Stand 1/2021

Änderungen und Irrtümer vorbehalten. Angaben in Millimeter (mm) / Specifications subject to change without notice. Dimensions in Millimeter (mm)