

Batteriekontakt / Battery Probe - UEBK-12496

Material (Material)

Kolben: Kupfer-Beryllium, vergoldet

(Plunger: Copper-Beryllium, gold plated)

Stifthülse: Messing, vergoldet

(Barrel: Brass, gold plated)

Feder: Edelstahl

(Spring: Stainless Steel)

Elektrische Spezifikation (Electrical specification)

Nennstrom: 3 A

(Rated current: 3 A)

Kontaktwiderstand: < 10 mΩ

(Contact resistance: < 10 mΩ)

Mechanische Spezifikation (Mechanical specification)

Minimum Raster: 1,78 mm

(Minimum Centers: 1,78 mm)

Max. Hub: 0,76 mm

(Max. travel: 0,76 mm)

Empfohlener Hub: 0,76 mm

(Recommended travel: 0,76 mm)



Federkraft: 0,48 N bei Empfohlenem Hub

(Spring Force: 0,48 N @ recommended travel)

Bestellinformation (Order information)

Art. Nr.: UEBK-12496

(Art. No.: UEBK-12496)

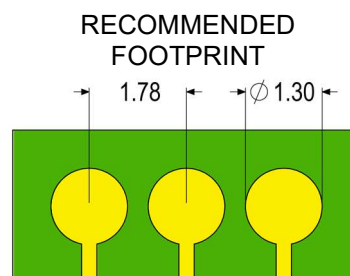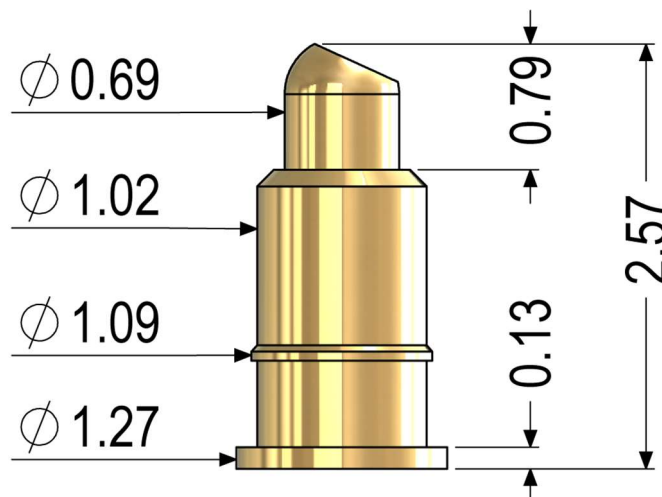

Stand 1/2021

Änderungen und Irrtümer vorbehalten. Angaben in Millimeter (mm) / Specifications subject to change without notice. Dimensions in Millimeter (mm)