

Batteriekontakt / Battery Probe - UEBK-12539

Material (Material)

Kolben: Messing, Duralloy™
(Plunger: Brass, Duralloy™)
Stifthülse: Messing, Duralloy™
(Barrel: Brass, Duralloy™)
Feder: Edelstahl
(Spring: Stainless Steel)

Elektrische Spezifikation (Electrical specification)


Nennstrom: 30 A
(Rated current: 30 A)
Kontaktwiderstand: < 5 mΩ
(Contact resistance: < 5 mΩ)

Mechanische Spezifikation (Mechanical specification)


Minimum Raster: 6,35 mm
(Minimum Centers: 6,35 mm)
Max. Hub: 2,08 mm
(Max. travel: 2,08 mm)
Empfohlener Hub: 1,37 mm
(Recommended travel: 1,37 mm)
Federkraft: 2,52 N bei Empfohlenem Hub
(Spring Force: 2,52 N @ recommended travel)

Bestellinformation (Order information)

Art. Nr.: UEBK-12539
(Art. No.: UEBK-12539)

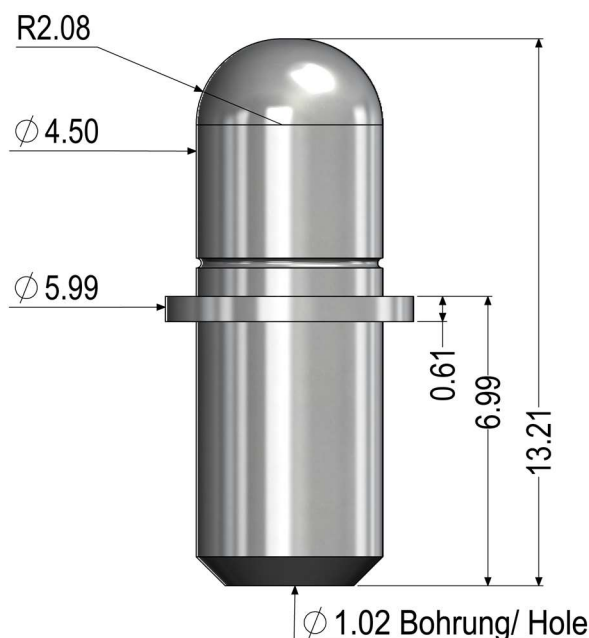

RECOMMENDED FOOTPRINT

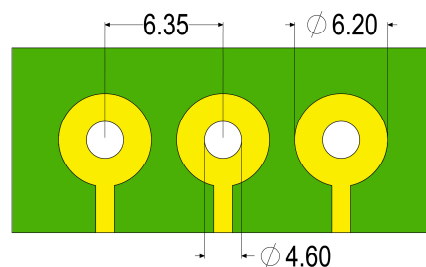

Stand 1/2021

Änderungen und Irrtümer vorbehalten. Angaben in Millimeter (mm) / Specifications subject to change without notice. Dimensions in Millimeter (mm)