

Batteriekontakt / Battery Probe - UEBK-12635

Material (Material)

Kolben: Messing, Duralloy™ vergoldet
(Plunger: Brass, Duralloy™ gold plated)
Stifthülse: Nickel-Silber, vergoldet
(Barrel: Nickel-Silver, gold plated)
Feder: Edelstahl
(Spring: Stainless Steel)

Elektrische Spezifikation (Electrical specification)


Nennstrom: 20 A
(Rated current: 20 A)
Kontaktwiderstand: < 10 mΩ
(Contact resistance: < 10 mΩ)

Mechanische Spezifikation (Mechanical specification)


Minimum Raster: 4,45 mm
(Minimum Centers: 4,45 mm)
Max. Hub: 2,03 mm
(Max. travel: 2,03 mm)
Empfohlener Hub: 1,27 mm
(Recommended travel: 1,27 mm)
Federkraft: 2,75 N bei Empfohlenem Hub
(Spring Force: 2,75 N @ recommended travel)

Bestellinformation (Order information)

Art. Nr.: UEBK-12635
(Art. No.: UEBK-12635)

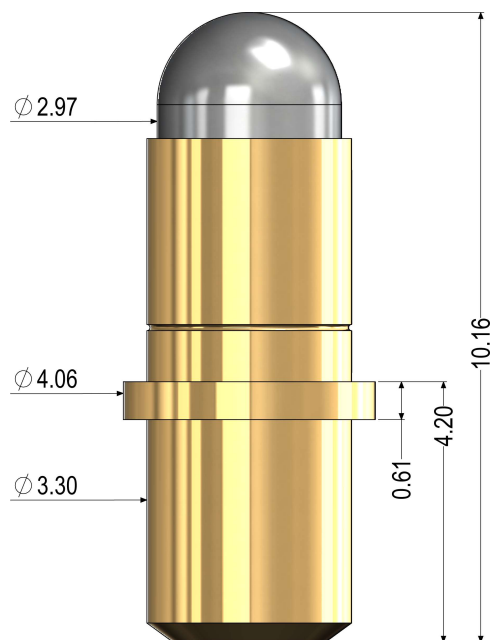

RECOMMENDED FOOTPRINT

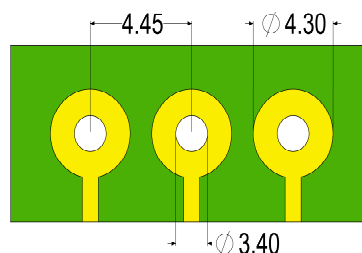

Stand 1/2021

Änderungen und Irrtümer vorbehalten. Angaben in Millimeter (mm) / Specifications subject to change without notice. Dimensions in Millimeter (mm)