

Batteriekontakt / Battery Probe - UEBK-12646

Material (Material)

Gehäuse: Schwarz HTN (UL94V-0)

(Housing: Black HTN UL94-0)

Kolben: Messing, vergoldet

(Plunger: Brass, gold plated)

Stifthülse: Messing, vergoldet

(Barrel: Brass, gold plated)

Feder: Edelstahl

(Spring: Stainless Steel)

Elektrische Spezifikation (Electrical specification)

Nennstrom: 1 A

(Rated Current: 1 A)

Kontaktwiderstand: < 100 mΩ

(Contact Resistance: < 100 mΩ)

Mechanische Spezifikation (Mechanical specification)

Kontakte: 3

(No. of contacts: 3)

Max Hub: 1,2 mm

(Max. travel: 1,2 mm)

Empfohlener Hub: 0,5 mm

(Recommended travel: 0,5 mm)

Federkraft: 0,5 N bei Empfohlenem Hub

(Spring Force: 0,5 N @ recommended travel)





Anschluss: SMD

(Connection: SMD)


Bestellinformation (Order Information)

Art. Nr. (Art. No.):

UEBK-12646

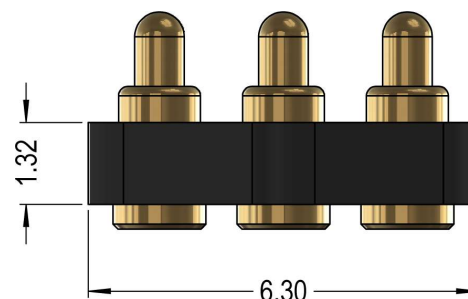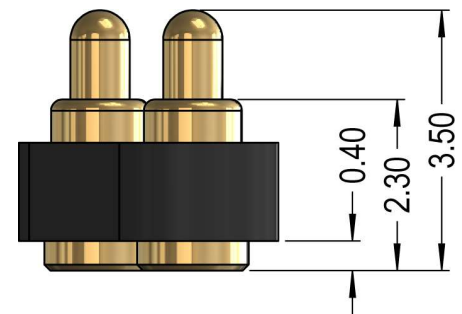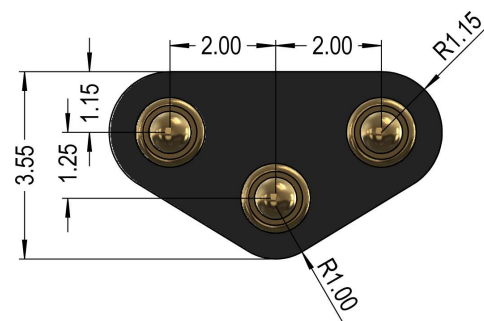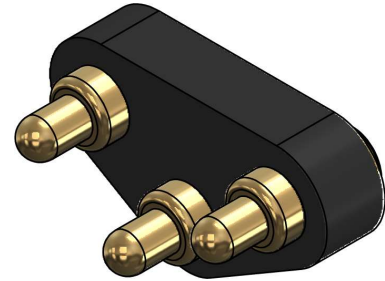

Batteriekontakt / Battery Probe - UEBK-12646-Tape / Reel

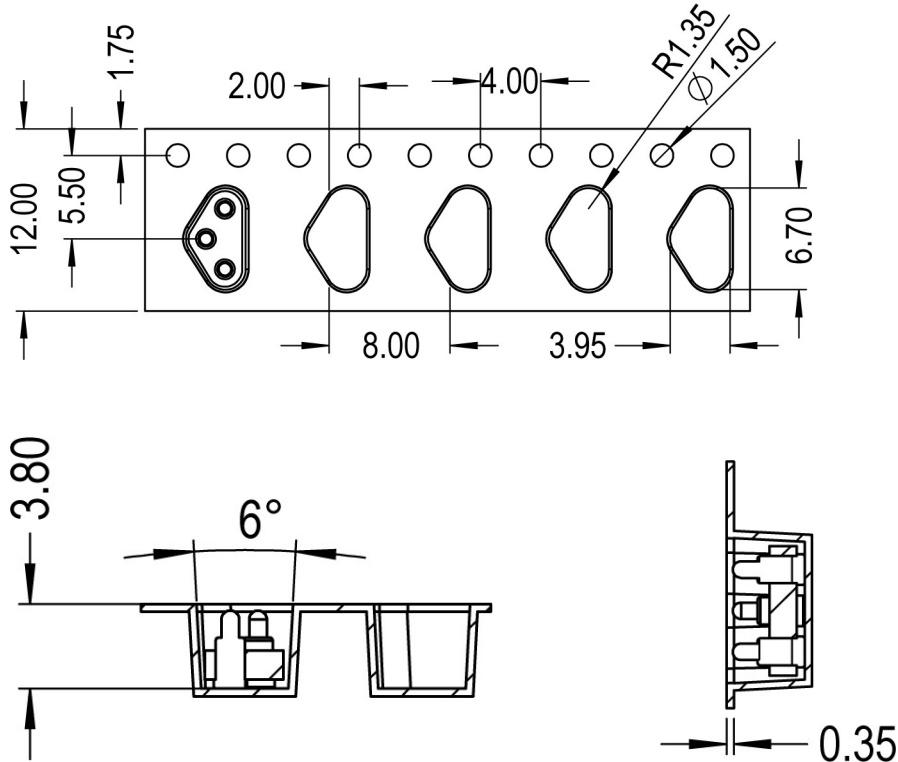

Mechanische Spezifikation (Mechanical specification)

Empfohlenes Bestückungsraster: 6,50 mm

(Recommended mounting grid: 6,50 mm)

Stückzahl: 2000 je Rolle

(Quantity: 2000 @ Reel)

Bestellinformation (Order information)

Art. Nr.: UEBK-13267

(Art. No.: UEBK-13267)

Seite 2 / 2
Stand 10/2020