

Batteriekontakt / Battery Probe - UEBK-12647

Material (Material)

Kolben: Kupfer-Beryllium, vergoldet

(Plunger: Copper-Beryllium, gold plated)

Stifthülse: Nickel-Silber, vergoldet

(Barrel: Nickel-Silver, gold plated)

Feder: Edelstahl

(Spring: Stainless Steel)

Elektrische Spezifikation (Electrical specification)

Nennstrom: 3 A

(Rated current: 3 A)

Kontaktwiderstand: < 50 mΩ

(Contact resistance: < 50 mΩ)

Mechanische Spezifikation (Mechanical specification)

Minimum Raster: 3,18 mm

(Minimum Centers: 3,18 mm)

Max. Hub: 1,50 mm

(Max. travel: 1,50 mm)

Empfohlener Hub: 1,00 mm

(Recommended travel: 1,00 mm)


Federkraft: 1,00 N bei Empfohlenem Hub

(Spring Force: 1,00 N @ recommended travel)

Bestellinformation (Order information)

Art. Nr.: UEBK-12647

(Art. No.: UEBK-12647)

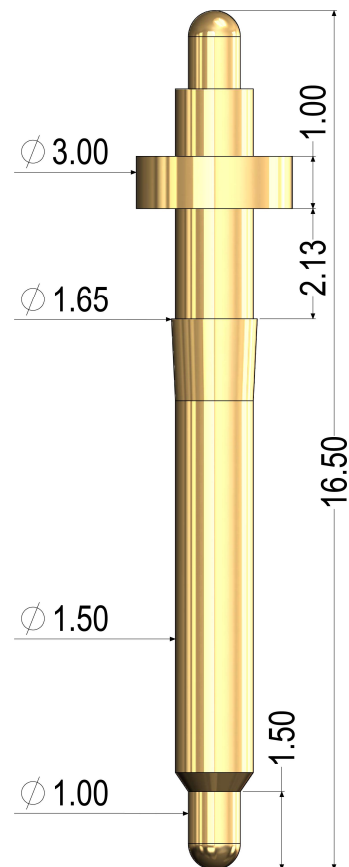

RECOMMENDED FOOTPRINT

