

Batteriekontakt / Battery Probe - UEBK-12778

Material (Material)

Kolben: Messing, vergoldet

(Plunger: Brass, gold plated)

Stifthülse: Messing, vergoldet

(Barrel: Brass, gold plated)

Feder: Edelstahl

(Spring: Stainless Steel)

Elektrische Spezifikation (Electrical specification)

Nennstrom: 1 A

(Rated current: 1 A)

Kontaktwiderstand: < 50 mΩ

(Contact resistance: < 50 mΩ)

Mechanische Spezifikation (Mechanical specification)

Max. Hub: 0,9 mm

(Max. travel: 0,9 mm)

Empfohlener Hub: 0,8 mm

(Recommended travel: 0,8 mm)

Federkraft: 1,2 N bei Empfohlenem Hub

(Spring Force: 1,2 N @ recommended travel)


Anschluss: SMD

(Connection: SMD)


Bestellinformation (Order information)

Art. Nr.: UEBK-12778




(Art. No.: UEBK-12778)

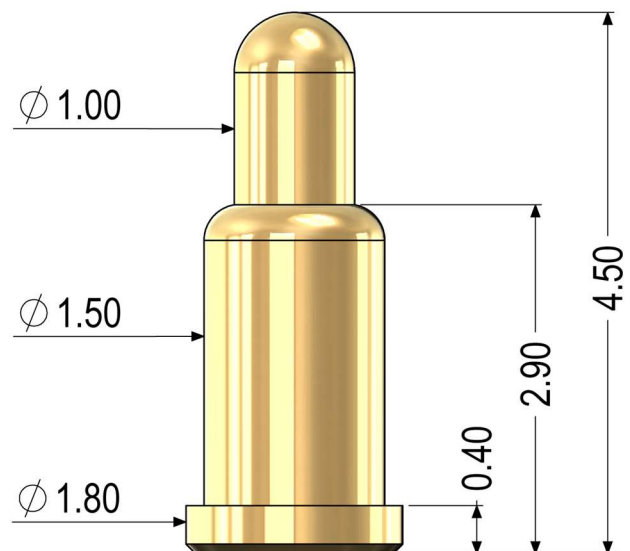

RECOMMENDED FOOTPRINT



Batteriekontakt / Battery Probe - UEBK-12778-Tape / Reel

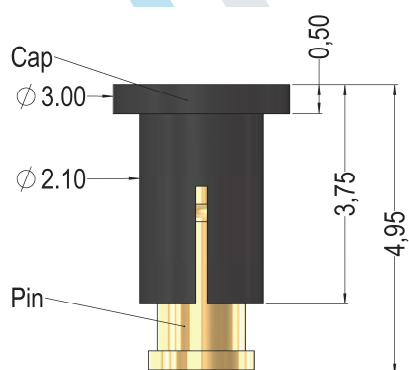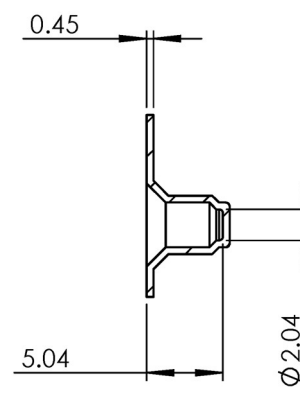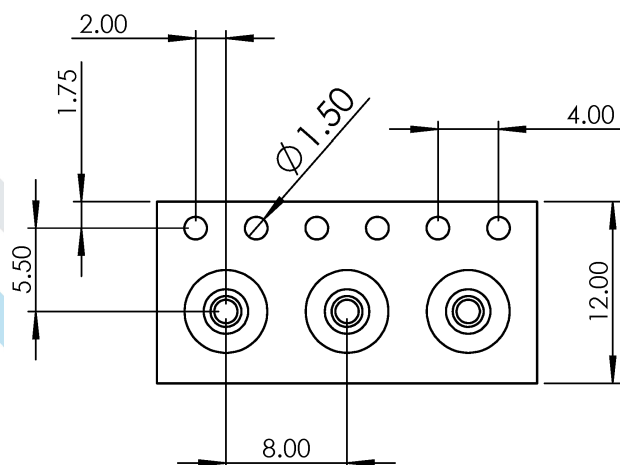

Mechanische Spezifikation (Mechanical specification)

Mindestbestückungsabstand: 2,1 mm

(Minimum mounting pitch: 2,1 mm)

Stückzahl: 1500 je Rolle

(Quantity: 1500 per Reel)

Bestellinformation (Order information)

Art. Nr.: UEBK-13207

(Art. No.: UEBK-13207)