

Batteriekontakt / Battery Probe - UEBK-12893

Material (Material)

Gehäuse: LCP +30% GF

(*Housing: LCP +30% GF*)

Kolben: Messing, vergoldet

(*Plunger: Brass, gold plated*)

Stifthülse: Messing, vergoldet

(*Barrel: Brass, gold plated*)

Feder: Edelstahl

(*Spring: Stainless Steel*)

Elektrische Spezifikation (Electrical specification)

Nennstrom: 1 A

(*Rated Current: 1 A*)

Kontaktwiderstand: < 50 mΩ

(*Contact Resistance: < 50 mΩ*)

Mechanische Spezifikation (Mechanical specification)

Kontakte: 4

(*No. of contacts: 4*)

Max. Hub: 1,6 mm

(*Max. travel: 1,6 mm*)

Empfohlener Hub: 1,0 mm

(*Recommended travel: 1,0 mm*)

Federkraft: 1,1 N bei Empfohlenem Hub

(*Spring Force: 1,1 N @ recommended travel*)





Anschluss: SMD / Horizontal

(*Connection: SMD / Horizontal*)


Bestellinformation (Order Information)

Art. Nr. (Art. No.):

UEBK-12893

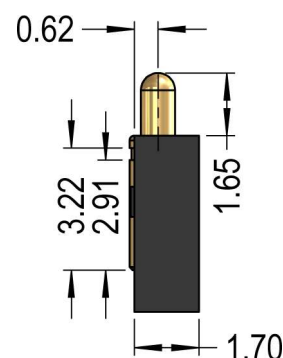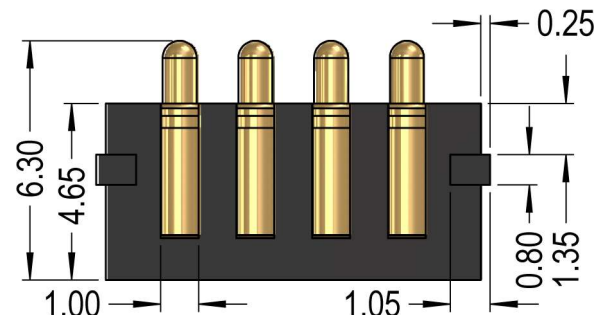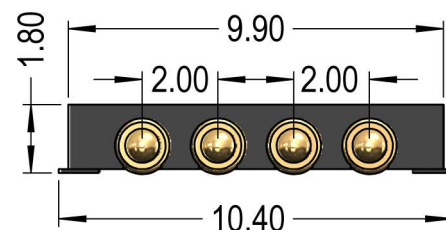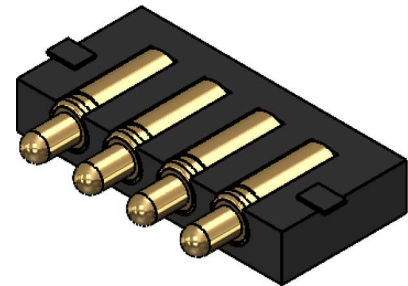

Batteriekontakt / Battery Probe - UEBK-12893 Tape / Reel

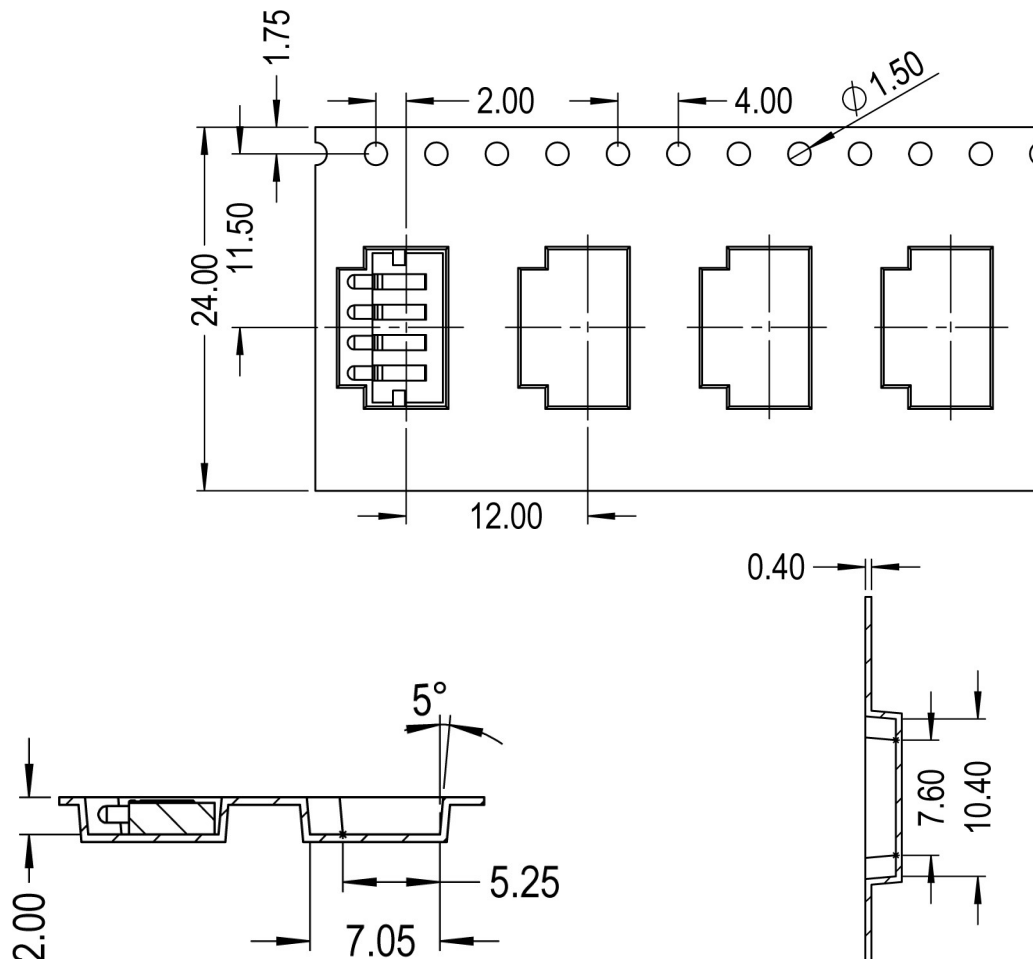

Mechanische Spezifikation (Mechanical specification)

Mindestbestückungsabstand: 10,0 mm

(Minimum mounting pitch: 10,0 mm)

Stückzahl: 1500 je Rolle

(Quantity: 1500 per Reel)

Bestellinformation (Order information)

Art. Nr.: UEBK-13269

(Art. No.: UEBK-13269)