

Batteriekontakt / Battery Probe - UEBK-13009

Material (Material)

Gehäuse: LCP (UL94V-0)

(Frame: LCP UL94V-0)

Kolben: Messing

(Plunger: Brass)

Stifthülse: Messing

(Barrel: Brass)

Feder: Federstahl

(Spring: Spring Steel)

Beschichtung: Nickel, vergoldet

(Plating: Au over Ni)

Elektrische Spezifikation (Electrical specification)

Nennstrom: 2 A

(Rated Current: 2 A)

Kontaktwiderstand: < 50 mΩ

(Contact Resistance: < 50 mΩ)

Mechanische Spezifikation (Mechanical specification)

Kontakte: 6

(No. of contacts: 6)

Minimum Raster: 2,54 mm

(Minimum Centers: 2,54 mm)

Max Hub: 1,4 mm

(Max. travel: 1,4 mm)

empfohlener Hub: 0,7 mm

(Recommended travel: 0,7 mm)

Federkraft: 1,5 N bei Nennfederweglänge



(Spring Force: 1,5 N @ working height)

Anschluss: SMD

(Connection: SMD)

Bestellinformation (Order Information)

Kontakt (Probe):
UEBK-13009

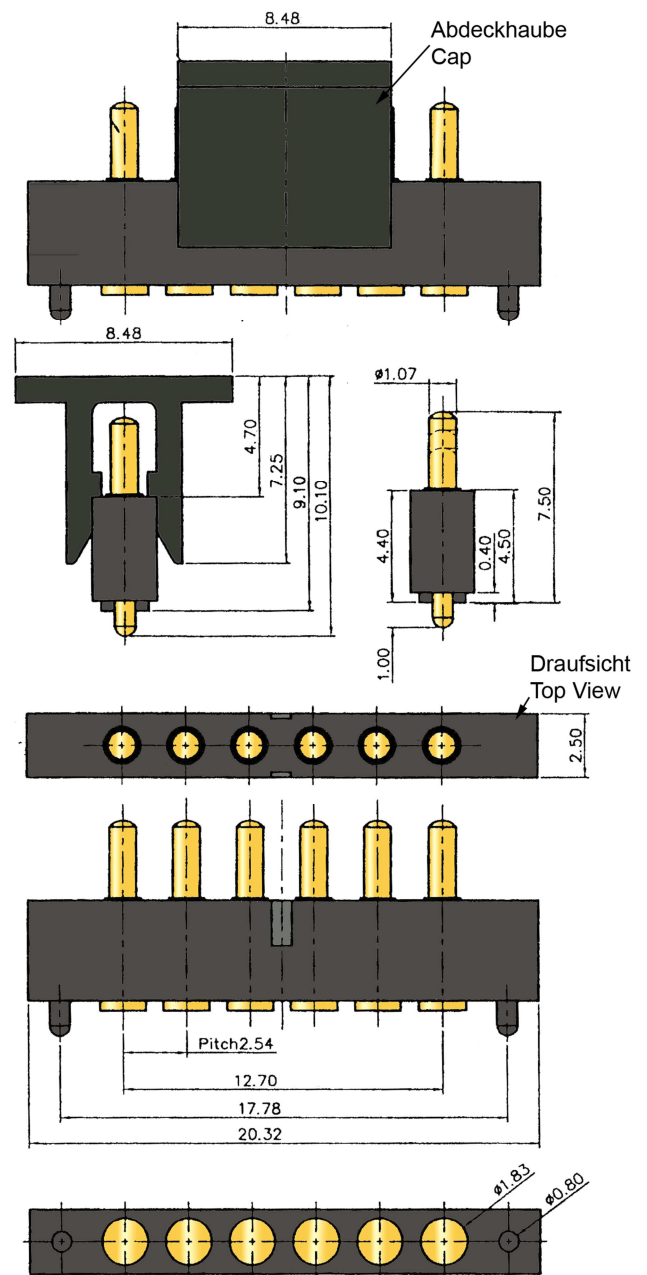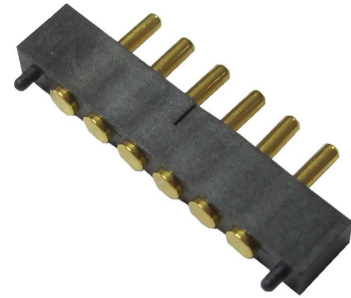

Änderungen und Irrtümer vorbehalten. Angaben in Millimeter (mm) / Specifications subject to change without notice. Dimensions in Millimeter (mm)