

Batteriekontakt / Battery Probe – UEBK-13137

Material (Material)

Kolben: Messing, vergoldet

(Plunger: Brass, gold plated)

Stifthülse: Messing, vergoldet

(Barrel: Brass, gold plated)

Feder: Edelstahl

(Spring: Stainless Steel)

Elektrische Spezifikation (Electrical specification)

Nennstrom: 1 A

(Rated current: 1 A)

Kontaktwiderstand: < 100 mΩ

(Contact resistance: < 100 mΩ)

Mechanische Spezifikation (Mechanical specification)

Max. Hub: 0,90 mm

(Max. travel: 0,90 mm)

Empfohlener Hub: 0,6 mm

(Recommended travel: 0,6 mm)

Federkraft: 1,0 N bei Empfohlenem Hub

(Spring Force: 1,0 N @ recommended travel)


Anschluss: SMD

(Connection: SMD)


Bestellinformation (Order information)

Art. Nr.: UEBK-13137



(Art. No.: UEBK-13137)

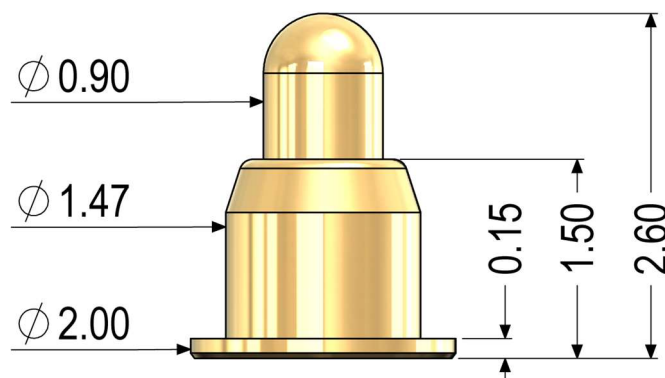

RECOMMENDED FOOTPRINT



Batteriekontakt / Battery Probe - UEBK-13137 Tape / Reel

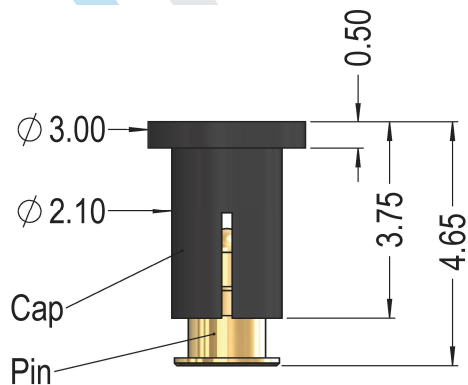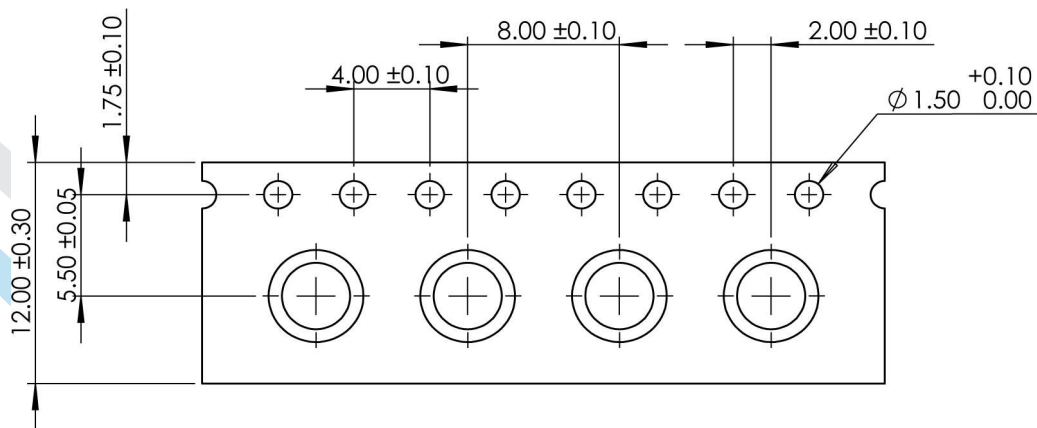

Mechanische Spezifikation (Mechanical specification)

Mindestbestückungsabstand: 3,4 mm

(Minimum mounting pitch: 3,4 mm)

Stückzahl: 2000 je Rolle

(Quantity: 2000 per Reel)

Bestellinformation (Order information)

Art. Nr.: UEBK-13353

(Art. No.: UEBK-13353)