

Batteriekontakt / Battery Probe - UEBK-13225

Material (Material)

Kolben: Messing, vergoldet

(Plunger: Brass, gold plated)

Stifthülse: Messing, vergoldet

(Barrel: Brass, gold plated)

Feder: Edelstahl

(Spring: Stainless Steel)

Elektrische Spezifikation (Electrical specification)

Nennstrom: 1 A

(Rated current: 1 A)

Kontaktwiderstand: < 50 mΩ

(Contact resistance: < 50 mΩ)

Mechanische Spezifikation (Mechanical specification)

Max. Hub: 2,10 mm

(Max. travel: 2,10 mm)

Empfohlener Hub: 2,00 mm

(Recommended travel: 2,00 mm)

Federkraft: 0,85 N bei Empfohlenem Hub

(Spring Force: 0,85 N @ recommended travel)


Anschluss: THT

(Connection: THT)



Bestellinformation (Order information)

Art. Nr.: UEBK-13225

(Art. No.: UEBK-13225)

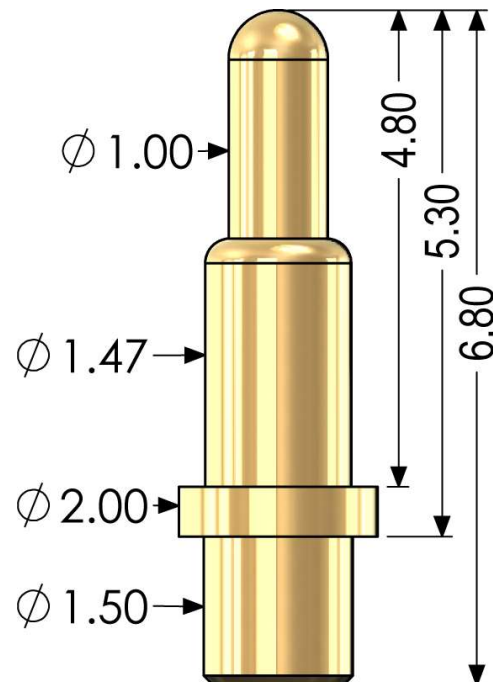

Batteriekontakt / Battery Probe - UEBK-13225 Tape / Reel

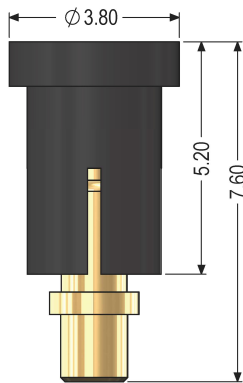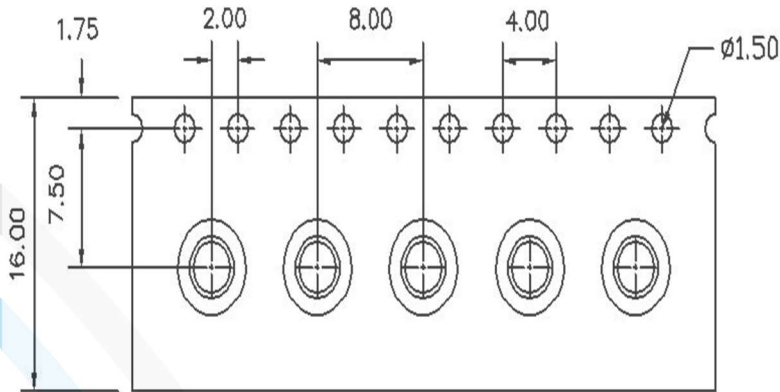

Mechanische Spezifikation (Mechanical specification)

Mindestbestückungsabstand: 4,20 mm

(Minimum mounting pitch: 4,20 mm)

Stückzahl: 1000 je Rolle

(Quantity: 1000 per Reel)

Bestellinformation (Order information)

Art. Nr.: UEBK-13281

(Art. No.: UEBK-13281)