

Batteriekontakt / Battery Probe - UEBK-13292

Material (Material)

Kolben: Kupferlegierung, vergoldet

(Plunger: Copper-Alloy, gold plated)

Stifthülse: Kupferlegierung, vergoldet

(Barrel: Copper-Alloy, gold plated)

Feder: Beryllium-Kupfer

(Spring: Beryllium-Copper)

Elektrische Spezifikation (Electrical specification)

Nennstrom: 2 A

(Rated current: 2 A)

Kontaktwiderstand: < 20 mΩ

(Contact resistance: < 20 mΩ)

Mechanische Spezifikation (Mechanical specification)

Max. Hub: 1,0 mm

(Max. travel: 1,0 mm)

Empfohlener Hub: 0,66 mm

(Recommended travel: 0,66 mm)

Federkraft: 0,80 N bei Empfohlenem Hub

(Spring Force: 0,80 N @ recommended travel)


Anschluss: THT

(Connection: THT)


Bestellinformation (Order information)

Art. Nr.: UEBK-13292


(Art. No.: UEBK-13292)

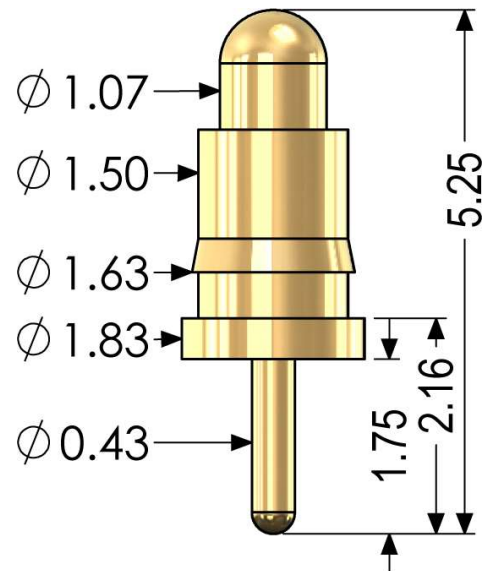

RECOMMENDED FOOTPRINT

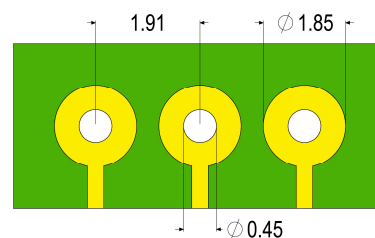

Batteriekontakt / Battery Probe - UEBK-13292 Tape / Reel

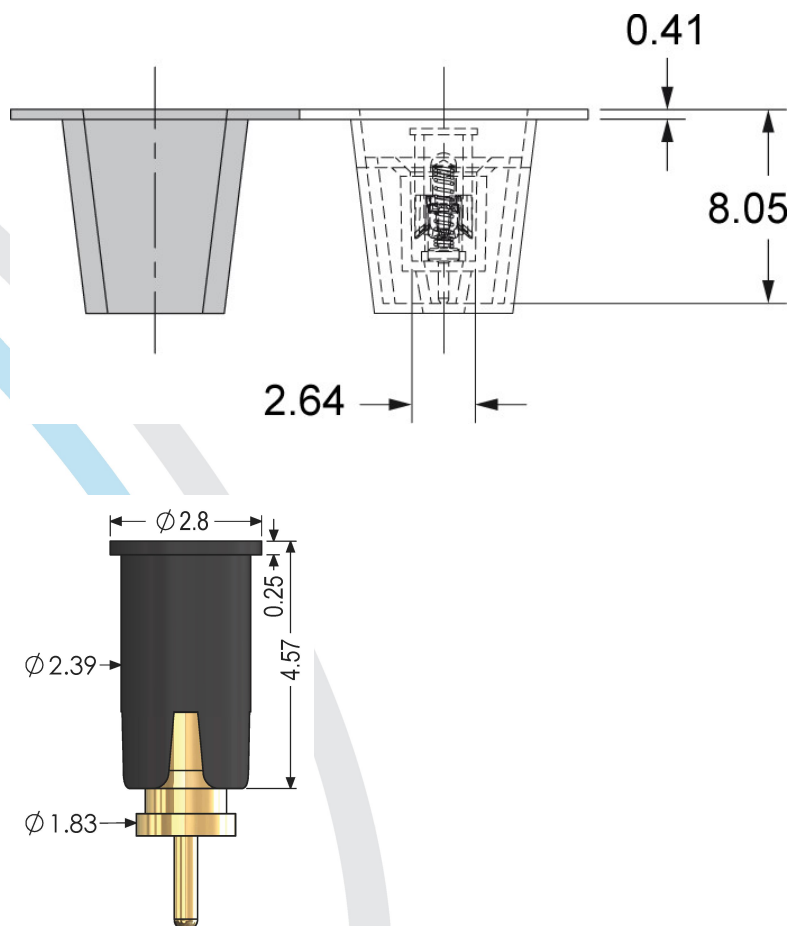

Mechanische Spezifikation (Mechanical specification)

Mindestbestückungsabstand: 3,00 mm

(Minimum mounting pitch: 3,00 mm)

Stückzahl: 640 je Rolle

(Quantity: 640 per Reel)

Bestellinformation (Order information)

Art. Nr.: UEBK-13293

(Art. No.: UEBK-13293)