

Batteriekontakt / Battery Probe - UEBK-13296

Material (Material)

Kolben: Kupferlegierung, vergoldet

(Plunger: Copper-Alloy, gold plated)

Stifthülse: Kupferlegierung, vergoldet

(Barrel: Copper-Alloy, gold plated)

Feder: Kupfer-Beryllium

(Spring: Copper-Beryllium)

Elektrische Spezifikation (Electrical specification)

Nennstrom: 2 A

(Rated current: 2 A)

Kontaktwiderstand: < 20 mΩ

(Contact resistance: < 20 mΩ)

Mechanische Spezifikation (Mechanical specification)

Minimum Raster: 1,27 mm

(Minimum Centers: 1,27 mm)

Max. Hub: 1,4 mm

(Max. travel: 1,4 mm)

Empfohlener Hub: 1,0 mm

(Recommended travel: 1,0 mm)


Federkraft: 0,85 N bei Empfohlenem Hub

(Spring Force: 0,85 N @ recommended travel)


Bestellinformation (Order information)

Art. Nr.: UEBK-13296

(Art. No.: UEBK-13296)

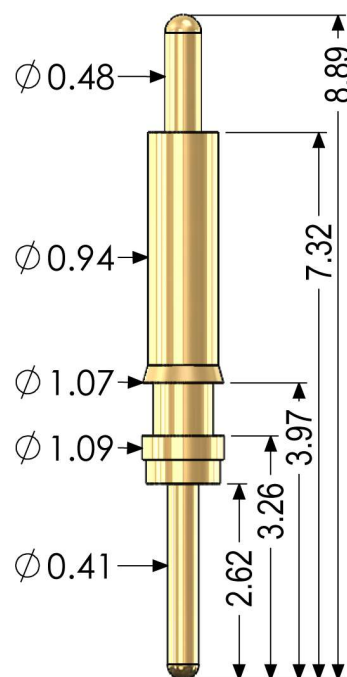

RECOMMENDED FOOTPRINT

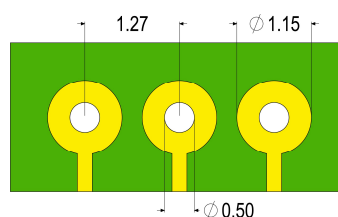

Stand 1/2021

Änderungen und Irrtümer vorbehalten. Angaben in Millimeter (mm) / Specifications subject to change without notice. Dimensions in Millimeter (mm)