

Batteriekontakt / Battery Probe - UEBK-13297

Material (Material)

Kolben: Kupferlegierung, vergoldet

(Plunger: Copper alloy, gold plated)

Stifthülse: Kupferlegierung, vergoldet

(Barrel: Copper alloy, gold plated)

Feder: Kupfer-Beryllium

(Spring: Copper-Beryllium)

Elektrische Spezifikation (Electrical specification)

Nennstrom: 2 A

(Rated current: 2 A)

Kontaktwiderstand: < 20 mΩ

(Contact resistance: < 20 mΩ)

Mechanische Spezifikation (Mechanical specification)

Minimum Raster: 2,54 mm

(Minimum Centers: 2,54 mm)

Max. Hub: 0,99 mm

(Max. travel: 0,99 mm)

Empfohlener Hub: 0,66 mm

(Recommended travel: 0,66 mm)


Federkraft: 0,40 N bei Empfohlenem Hub

(Spring Force: 0,40 N @ recommended travel)


Bestellinformation (Order information)

Art. Nr.: UEBK-13297

(Art. No.: UEBK-13297)

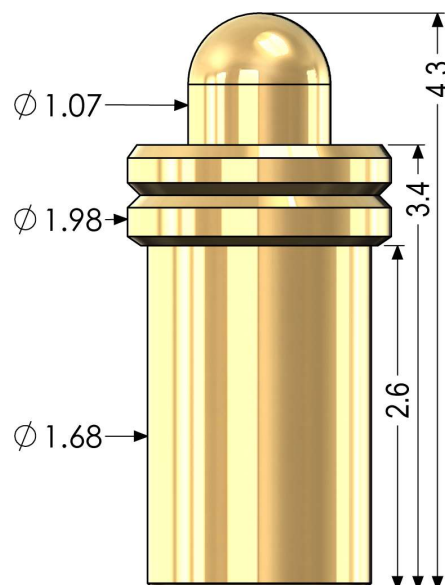

RECOMMENDED FOOTPRINT



Stand 1/2021

Änderungen und Irrtümer vorbehalten. Angaben in Millimeter (mm) / Specifications subject to change without notice. Dimensions in Millimeter (mm)