
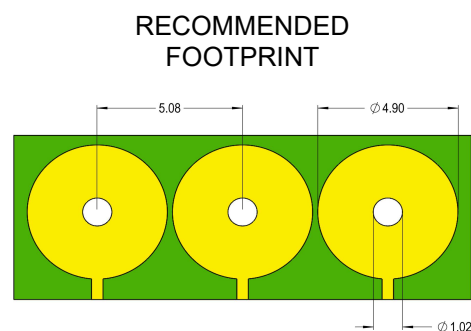


## Batteriekontakt / Battery Probe - UEBK-13355

| Material<br>(Material)                                                                              |  |
|-----------------------------------------------------------------------------------------------------|--|
| <u>Kolben:</u> Kupfer, vergoldet<br>( <i>Plunger: Copper, gold plated</i> )                         |  |
| <u>Stifthülse:</u> Kupfer, vergoldet<br>( <i>Barrel: Copper, gold plated</i> )                      |  |
| <u>Feder:</u> Edelstahl<br>( <i>Spring: Stainless Steel</i> )                                       |  |
| Elektrische Spezifikation<br>(Electrical specification)                                             |  |
| <u>Nennstrom:</u> 9 A<br>( <i>Rated current: 9 A</i> )                                              |  |
| <u>Kontaktwiderstand:</u> < 20 mΩ<br>( <i>Contact resistance: &lt; 20 mΩ</i> )                      |  |
| Mechanische Spezifikation<br>(Mechanical specification)                                             |  |
| <u>Minimum Raster:</u> 5,08<br>( <i>Minimum Centers: 5,08</i> )                                     |  |
| <u>Max. Hub:</u> 2,03 mm<br>( <i>Max. travel: 2,03 mm</i> )                                         |  |
| <u>Empfohlener Hub:</u> 1,09 mm<br>( <i>Recommended travel: 1,09 mm</i> )                           |  |
| <u>Federkraft:</u> 1,2 N bei Empfohlenem Hub<br>( <i>Spring Force: 1,2 N @ recommended travel</i> ) |  |
| Bestellinformation<br>(Order information)                                                           |  |
| <u>Art. Nr.:</u> UEBK-13355<br>( <i>Art. No.: UEBK-13355</i> )                                      |  |

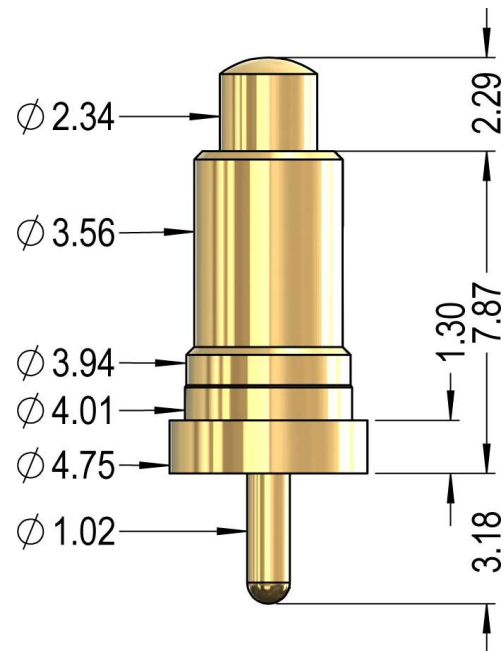

Stand 1/2021

Änderungen und Irrtümer vorbehalten. Angaben in Millimeter (mm) / Specifications subject to change without notice. Dimensions in Millimeter (mm)