

Batteriekontakt / Battery Probe – UEBK-13364

Material (Material)

Kolben: Kupfer-Beryllium, vergoldet
(Plunger: Copper-Beryllium, gold plated)

Stifthülse: Messing, vergoldet
(Barrel: Brass, gold plated)

Feder: Federstahl
(Spring: Spring Steel)

Elektrische Spezifikation (Electrical specification)

Nennstrom: 5 A
(Rated current: 5 A)

Kontaktwiderstand: < 30 mΩ
(Contact resistance: < 30 mΩ)

Mechanische Spezifikation (Mechanical specification)

Minimum Raster: 2,54 mm
(Minimum Centers: 2,54 mm)


Max. Hub: 3,5 mm
(Max. travel: 3,5 mm)

Empfohlener Hub: 2,0 mm
(Recommended travel: 2,0 mm)


Federkraft: 2,3 N bei Empfohlenem Hub
(Spring Force: 2,3 N @ recommended travel)

Bestellinformation (Order information)

Art. Nr.: UEBK-13364
(Art. No.: UEBK-13364)

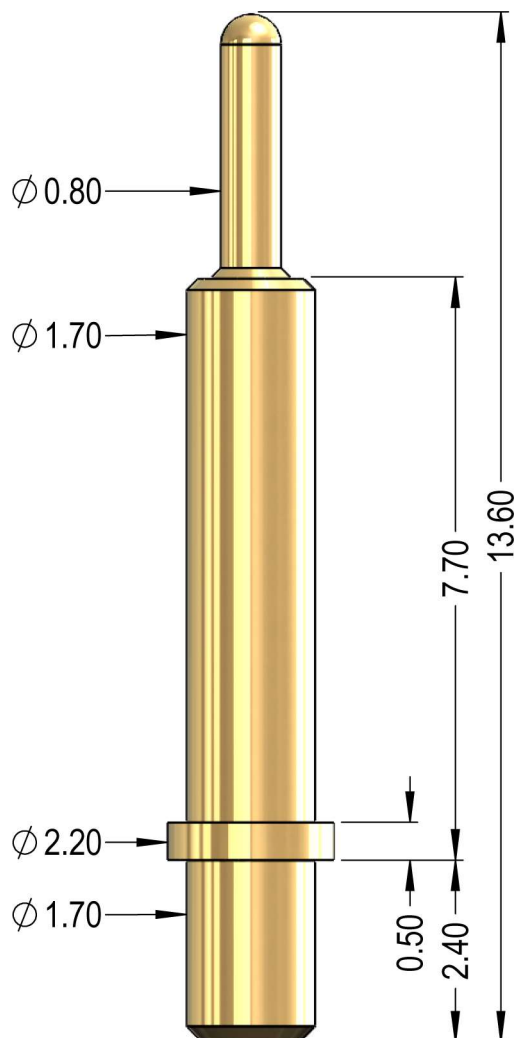

RECOMMENDED FOOTPRINT

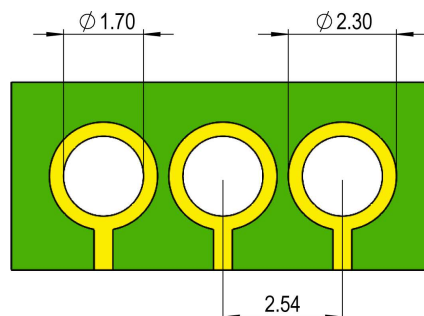

Stand 1/2021

Änderungen und Irrtümer vorbehalten. Angaben in Millimeter (mm) / Specifications subject to change without notice. Dimensions in Millimeter (mm)