

Batteriekontakt / Battery Probe - UEBK-30999 / UEBK-30997

Material (Material)

Kolben: Messing, vergoldet

(Plunger: Brass, gold plated)

Stifthülse: Messing, vergoldet

(Barrel: Brass, gold plated)

Feder: Edelstahl

(Spring: Stainless Steel)

Elektrische Spezifikation (Electrical specification)

Nennstrom: 5 A

(Rated current: 5 A)

Kontaktwiderstand: < 10 mΩ

(Contact resistance: < 10 mΩ)

Mechanische Spezifikation (Mechanical specification)

Minimum Raster: 6,50 mm

(Minimum Centers: 6,50 mm)

Max. Hub: 4,00 mm

(Max. travel: 4,00 mm)

Empfohlener Hub: 3,20 mm

(Recommended travel: 3,20 mm)

Federkraft: 8 N bei Empfohlenem Hub (UEBK-30999)

Federkraft: 1.5 N bei Empfohlenem Hub (UEBK-30997)


(Spring Force: 8 N @ recommended travel (UEBK-30999))

(Spring Force: 1.5 N recommended travel (UEBK-30997))


Bestellinformation (Order information)

Art. Nr.: UEBK-30999 / UEBK-30997

(Art. No.: UEBK-30999 / UEBK-30997)

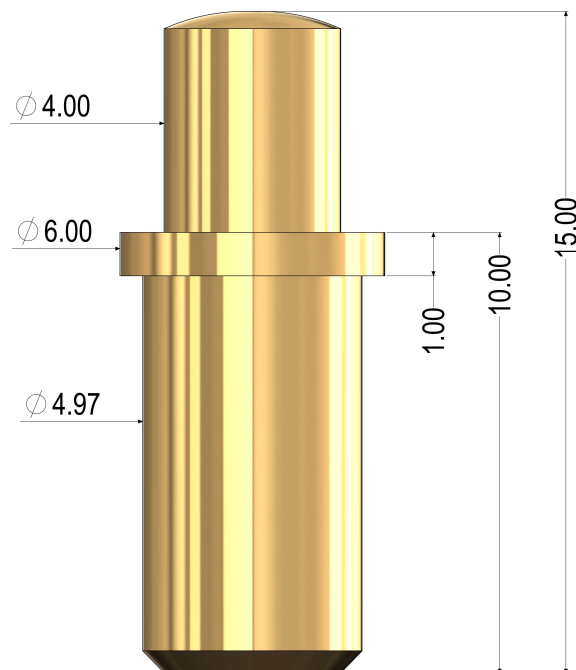

RECOMMENDED FOOTPRINT

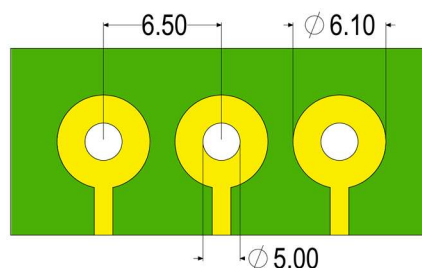

Stand 4/2022

Änderungen und Irrtümer vorbehalten. Angaben in Millimeter (mm) / Specifications subject to change without notice. Dimensions in Millimeter (mm)