

Batteriekontakt / Battery Probe - UEBK-45347

Material (Material)

Kolben: Kupfer-Beryllium, vergoldet

(Plunger: Copper-Beryllium, gold plated)

Stifthülse: Messing, vergoldet

(Barrel: Brass, gold plated)

Feder: Federstahl

(Spring: Music Wire)

Elektrische Spezifikation (Electrical specification)

Nennstrom: 8 A

(Rated current: 8 A)

Kontaktwiderstand: < 30 mΩ

(Contact resistance: < 30 mΩ)

Mechanische Spezifikation (Mechanical specification)

Minimum Raster: 6,50 mm

(Minimum Centers: 6,50 mm)

Max. Hub: 10,0 mm

(Max. travel: 10,0 mm)

Empfohlener Hub: 8,0 mm

(Recommended travel: 8,0 mm)


Federkraft: 8 N bei Empfohlenem Hub

(Spring Force: 8 N @ recommended travel)


Bestellinformation (Order information)

Art. Nr.: UEBK-45347

(Art. No.: UEBK-45347)

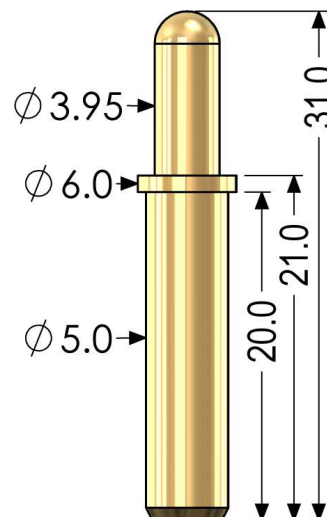

RECOMMENDED FOOTPRINT

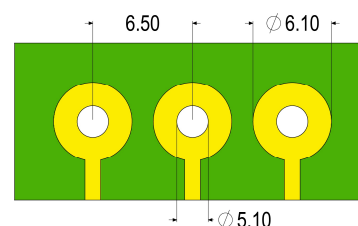

Stand 1/2021

Änderungen und Irrtümer vorbehalten. Angaben in Millimeter (mm) / Specifications subject to change without notice. Dimensions in Millimeter (mm)