

Federkontakt / Spring Contact – UEFK-G020

Material (Material)

Kolben: gehärteter Stahl, Palladium beschichtet über Nickel

(optional: Gold beschichtet über Nickel)

(Plunger: Hardened Steel, Palladium plated over Nickel (optional: Gold plated over Nickel))

Stifthülse: Phosphor Bronze, Gold beschichtet

(Barrel: Phosphor Bronze, Gold plated)

Feder: Federstahl

(Spring: Music wire)

Beschichtung der Hülse: Gold beschichtet

(Plating of Receptacle: Gold plated)

Hülse: Phosphor-Bronze / Messing

(Receptacle: Phosphor-Bronze / Brass)

Elektrische Spezifikation (Electrical specification)

Nennstrom: 0,3 A

(Rated current: 0,3 A)

Kontaktwiderstand: < 300 mΩ

(Contact resistance: < 300 mΩ)

Mechanische Spezifikation (Mechanical specification)

Minimum Raster: 0,45 mm

(Minimum Centers: 0,45 mm)

Max Hub: 1,5 mm

(Max. travel: 1,5 mm)

empfohlener Hub: 0,7 mm

(Recommended travel: 0,7 mm)

Federkraft: 7 g bei Nennfederweglänge

(Spring Force: 7 g @ working height)

Federvorspannung: 4 g

(Preload force: 4 g)



Anschluss: Preattached Wire Receptacle (G020SW)

(Connection: Preattached Wire Receptacle (G020SW))

Bestellinformation (Order information)

Federkontakt *(Spring Contact)* Art No.: UEFK-G020-A

Hülse *(Receptacle)* Art No.: UEFK-G020-SW

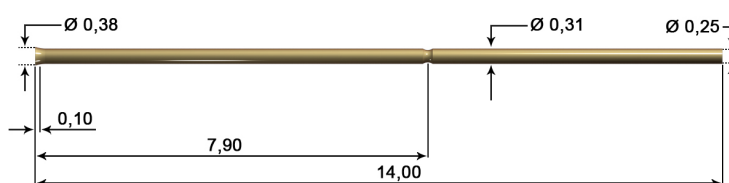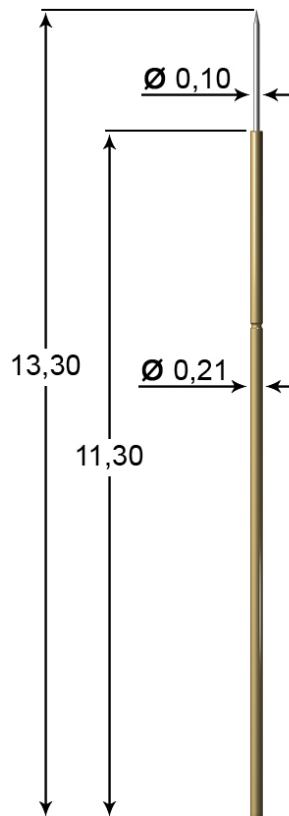

Mounting Hole Size: ~0.35 mm

G020SW - Preattached Wire Receptacle



Wire AWG 30



Manufactured by **LEENO**

Änderungen und Irrtümer vorbehalten. Angaben in Millimeter [mm] / Specifications subject to change without notice. Dimensions in Millimeter [mm]