

Federkontakt / Spring Contact – UEFK-G070L

Material (Material)

Kolben: gehärtetes Beryllium-Kupfer, Palladium beschichtet über Nickel
(optional: Gold beschichtet über Nickel)

(Plunger: Hardened Beryllium-Copper, Palladium plated over Nickel)
(optional: Gold plated over Nickel)

Stifthülse: Messing, Gold beschichtet

(Barrel: Brass, Gold plated)

Feder: Federstahl

(Spring: Music wire)

Beschichtung der Hülse: Gold beschichtet

(Plating of Receptacle: Gold plated)

Hülse: kaltverfestigte(s) Nickel-Silber / Phosphor-Bronze / Messing

(Receptacle: work-hardened Nickel-Silver / Phosphor-Bronze / Brass)

Elektrische Spezifikation (Electrical specification)

Nennstrom: 3 A

(Rated current: 3 A)

Kontaktwiderstand: < 50 mΩ

(Contact resistance: < 50 mΩ)

Mechanische Spezifikation (Mechanical specification)

Minimum Raster: 1,27 mm

(Minimum Centers: 1,27 mm)

Max Hub: 4,2 mm

(Max. travel: 4,2 mm)

empfohlener Hub: 2,8 mm

(Recommended travel: 2,8 mm)

Federkraft: 70 g bei Nennfederweglänge

(Spring Force: 70 g @ working height)

Federvorspannung: 10 g

(Preload force: 10 g)

Anschluss: Crimp (G070LTW) / Wire-Wrap (G070LCW)



(Connection: Crimp (G070LTW) / Wire-Wrap (G070LCW))

Bestellinformation (Order information)

Federkontakt **(Spring Contact)** Art No.:

UEFK-G070L-A/ -C/ -AM/ -M/ -RS/ -S/ -SS

Hülse **(Receptacle)** Art No.: UEFK-G070L-TW / -CW

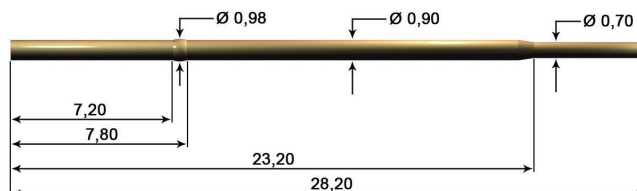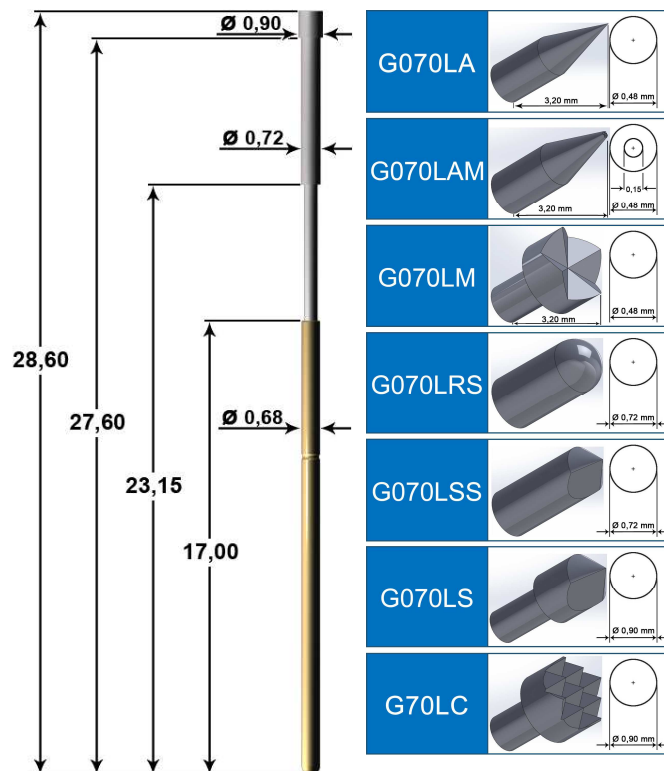

Mounting Hole Size: ~0,90 mm

G070L-TW - Crimp Style Receptacle



G070L-CW - Preattached Wire Receptacle



Wire AWG 30

Manufactured by **LEENO**

Änderungen und Irrtümer vorbehalten. Angaben in Millimeter [mm] / Specifications subject to change without notice. Dimensions in Millimeter [mm]