


Series S

SIZE 00 0.99 CENTERS

BeCu PLUNGER TIPS

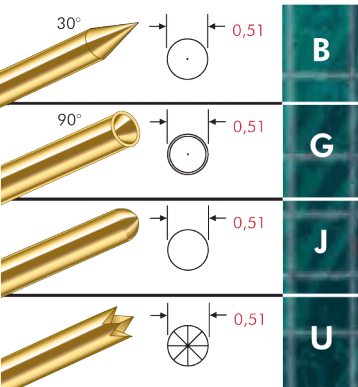

PROBE SPECIFICATIONS

Minimum Centers: **0,99**

Current Rating: 3 amps
continuous

Spring Force: 1.3 or 1.6 oz.
@ **1,27** travel

Typical Resistance : <55 mΩ

Working Travel: **1,27**

Rated Force gms	Preload gms	Material
37	17	BeCu
45	20	SS

MATERIALS

Barrel: Nickel/silver, preplated
gold

Spring: Beryllium copper or
stainless steel, gold plated

Plunger: Full-hard beryllium
copper, gold plated over
nickel or optional Duralloy™


Receptacle: Nickel/silver,
gold plated

FP-Plug: Beryllium copper,
pre-plated gold

S-00 PROBE



R-00 Receptacles

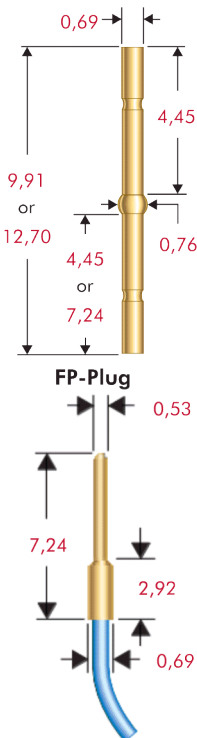

Drill Size: 0,75mm
Mounting Hole Size:
0,71/0,75
Recommended Wire:
30 gage

RECEPTACLE OPTIONS

Part Number	Style	Receptacle or Terminal Length	Probe/Receptacle Combined Length	Probe/Recep./Terminal Combined Length
R-00-W-390	Receptacle*	9,91	23,24	29,85
R-00-W-500	Receptacle*	12,70	26,04	32,64
FP-Plug		7,24	—	—

* To order with preattached wire, add wire length and strip length (in inches) to the end of the part number. For example: R-00-W-390-36-1

HOW TO ORDER: SPRING CONTACT PROBE

S	00	J	1.3	G
SERIES	SIZE	TIP STYLE	SPRING FORCE	PLATING OPTIONS

SPRING FORCE:
1.3 oz. @ **1,27** travel
1.6 oz. @ **1,27** travel

PLATING OPTIONS:
G: Gold Plated Plunger
D: Duralloy™ Plated Plunger

RECEPTACLE

R	00	W
SERIES	SIZE	TERMINATION

TERMINATIONS:
W: Receptacle*

Specifications subject to change without notice. Dimensions in **millimeters**