


Series SS

SIZE 30

0.76 CENTERS

BeCu PLUNGER TIPS

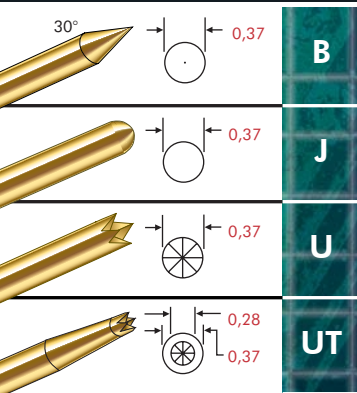

PROBE SPECIFICATIONS

Minimum Centers: **0,99**

Current Rating: 3 amps
continuous

Spring Force: 1.3 or 1.6 oz.
@ **1,70** travel

Typical Resistance : <40 mΩ

Maximum Travel: **2,54**

Working Travel: **1,70**

Rated Force gms	Preload gms)	Material
37	14	SS
45	14	MW

MATERIALS

Barrel: Nickel/silver, gold plated

Spring: Stainless steel or music
wire, gold plated


Plunger: Full-hard beryllium
copper, gold plated over
nickel or optional Duralloy™

Receptacle: Nickel/silver,
gold plated

SS-30 PROBE



RSS-30 Receptacle

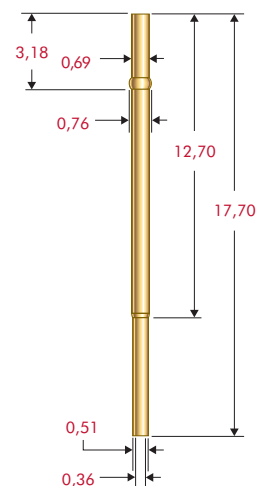

Drill Size: 0,75mm

Mounting Hole Size:
0,71/0,75

Recommended Wire:
30 gage

RECEPTACLE OPTIONS

Part Number Length	Style Combined Length	Receptacle	Probe/Receptacle	Comments
R-SS-30-CR	Crimp	17,70	20,50	
R-SS-30-SC	Solder Cup	17,70	20,50	
R-SS-30-PS	Preattached Wire*	17,70	20,50	30 gage, vacuum sealed

*Unless otherwise specified, wire length = 36" with a 1" semi strip

HOW TO ORDER: SPRING CONTACT PROBE

SS

SERIES

30

SIZE

B

TIP
STYLE

1.3

SPRING
FORCE

G

PLATING
OPTIONS

SPRING FORCE:

1.3 oz. @ .067 (**1,70**) travel

1.6 oz. @ .067 (**1,70**) travel

PLATING OPTIONS:

G: Gold Plated Plunger

D: Duralloy™ Plated Plunger

RECEPTACLE

R-SS

SERIES

30

SIZE

CR

TERMINATIONS

TERMINATIONS:

CR: Crimp

SC: Solder Cup

PS: Preattached Wire*

* Unless otherwise specified, wire
length = 36" with a 1" semi-strip

Specifications subject to change without notice. Dimensions in **millimeters**.