


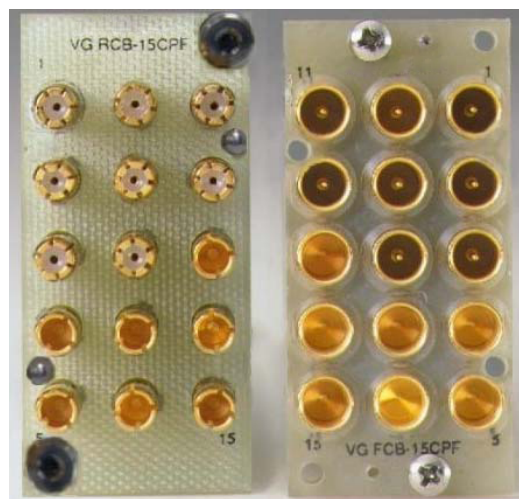

VGRCB-15CPF

VGFCB-15CPF

VGRCB-15CPF

VGFCB-15CPF

The VGRCB-13CPF provides 15 contacts for coax, power or a combination of both contact styles. Coax contacts are provided for signals up to 500 Mhz and power signals up to 30 Amps / 250 VAC. Proper alignment is ensured by two precision alignment pins per block. Two shoulder mounting screws per VGR block allow the block to float in the receiver. Contacts, blocks and cables sold separately.

Coax Contact Pair Specifications

Voltage	250VAC
Current	1.5 Amps
Contact Resistance	6mΩ
Capacitance.....	5pf
Inductance.....	3nH
Bandwidth (-3db roll off)	500 Mhz
Durability.....	25,000 cycles
Coax Connection Type	Crimp

Power Contact Pair Specifications

Power Contact.....	30 Amps
--------------------	---------

Ordering Information

Receiver

Receiver Module	VGRCB-15CPF
36" Receiver Coax Cable Assy	CR-CA50RG174-36
Receiver Power Contact	CR-610116102

Accessories

Receiver Contact Extraction Tool	VGRXT
Receiver Alignment Pin Installation Tool.....	B32503



Fixture

Fixture Module	VGFCB-15CPF
36" Fixture Coax Cable Assy	CF-CA50RG174-36
10 AWG Fixture Power Contact	CF-610115102
12 AWG Fixture Power Contact.....	CF-610115103

Fixture Contact Extract Tool	VGEXT
------------------------------------	-------

