


Mechanical Test Fixture with Top-Head



-
- 3 standard sizes available (UE-MA1, UE-MA2, UE-MA3)
 - special design upon request
 - all exchangeable inserts
 - auxiliary electronic and -pneumatic integrable in the basic device
 - rugged interfaces with spring contact probes
 - up to 840 transfer pins integrable
 - max. 450 spring contact probes for up to 2N
 - dimensions DUT/PCB:
 - 200mm x 165mm (UE-MA1/WA1)
 - 380mm x 265mm (UE-MA2/WA2)

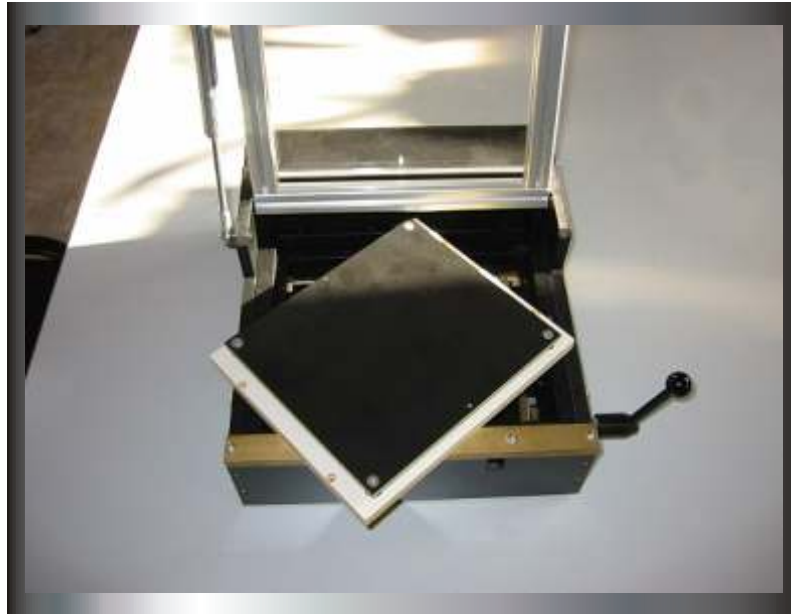

all exchangeable insert
incl. transfer interface

exchangeable insert
without transfer interface
UE-WA1 (200mm x 165mm)
UE-WA2 (380mm x 265mm)



Technical Details:

Fixture:

UE-MA1: test fixture (universal basic fixture)
without integrated interface (VG-block-interface)
Dimension: incl. handle bar, closure head, lift
(BxHxT) approx. 345 x 135 x 345mm

UE-MA2: test fixturer (universal basic fixture)
without integrated interface (VG-block-interface)

exchangeable insert:

UE-WA1: exchangeable insert for PCBs up to 200 x 165mm

Technical Details (sequel):

UE-WA2: exchangeable insert for PCBs for up to 380 x 265mm

VG-block-interface:


Internal VG-block-interface, 170 pins with different connections

wiring facilities:

- VGRCB 170-H-R (connector)
- VGRCB 170-H-WW (Wire Wrap)
- VGRCB 170-H-SC (solder connection)



UE-MA1 with exchangeable insert UE-WA1

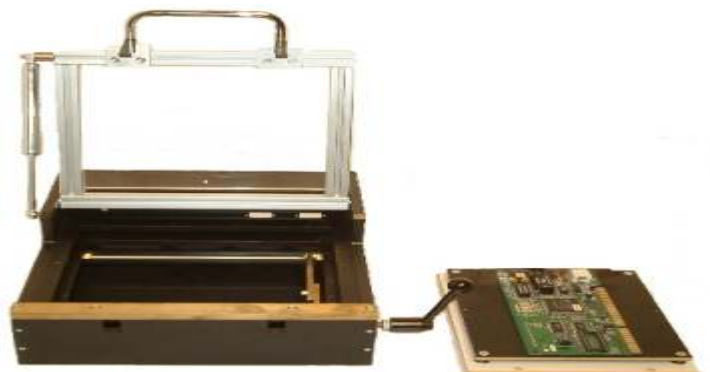

UE-MA2 with exchangeable insert UE-WA2



VG-block-interface(170 pins)